

Autonomous networks of sensor-based mini-stations

AIR QUALITY MONITORING SYSTEMS

"40 years of experience in the field of environmental monitoring to the benefit of our micro-sensors"

Cairnet® device is a real-time standalone and networkable air-monitoring station including up to six Cairsens® microsensors. It is powered by solar panels and offers cellular communication.



Cairnet® enables you to cost-effectively monitor dust and gas and gives a complete picture of the environmental impact of your operations.

It offers unprecedented flexibility in producing accurate and dynamic air quality measurements across a broad range of industries and applications.







MAIN BENEFITS - New

- Real time, continuous and simultaneous measurement and monitoring of **up to 6** parameters among H₂S/CH₄S, NH₃, nmVOC, O₃/NO₂, NO₂, CO, SO₂, PM. Plus environmental parameters: temperature, relative humidity and pressure
- Plug & Play Network: automatic detection, linking and configuration of the network (Cairsens® / Cairnet® / Caircloud®) with no manual intervention required
- Integrated manifold allowing a **dynamic sampling**. Electronic compounds are sealed & protected from moisture and corrosive ambient air
- Automated data saving (micro SD card) and push: no consequence in case of lost communication service
- Communication frequency and measured data volume adapted automatically to the autonomy of the station
- Very high sensitivity to capture low level gas concentrations (down to ppb)
- Modular, easy to use and move on-site: no cables
- Cairnet® requires only annual maintenance: when sensors should be renewed
- Operating cost savings: process adjustment & Improvement of local communication (neighbors & authorities)
- Possibility to set up hybrid AQMS networks (reference stations & mini-stations)







MAIN APPLICATIONS

- Odor monitoring: WWTP, recycling, pulp and paper manufacturing, sewerage treatment facilities, refineries
- Indoor and outdoor air quality monitoring: smart cities, road-side & tunnels, schools, airports, ship terminals...
- Process leak detection and monitoring of fugitive emissions: quarries, storage facilities, mines, manufacturing plants
- Forecasting of industrial fence line emissions
- Environmental impact assessments
- Health and safety: mines, industrial sites, construction
- Mapping and modelling pollution sources



IT'S SO SMALL THAT IT FITS EVERYWHERE





A VERSATILE SOLUTION, READY TO USE

Cairnet® is a real-time air-monitoring mini-station featuring up to 6 Cairsens® micro-sensors inside a waterproof enclosure. Thanks to its cellular communication and solar panels, Cairnet® enables you to cost-effectively monitor dust and gases, with centralized data management in the cloud (Caircloud®).




ACCESS YOUR DATA WHEN, AND WHERE YOU WANT



- Remote diagnosis: Real-time monitoring of Cairsens® sensors' lifetime, battery charge and power supply
- Data export via **API** REST, FTP server, SFTP server ...
- Secured browser (from mobile phone, tablet or PC)
- Friendly and adaptive user interface
- Secured database hosted on our server

- Real-time monitoring and management of all sites through only one interface
- Dyamic air quality data view: tables, graphs, filters...
- Data storage for up to 3 years
- Data export (.xlsx, .csv, .pdf, .jpeg...)

Provided data is compatible with Air Quality Data Acquisition systems and databases such as the XR® software from ENVEA

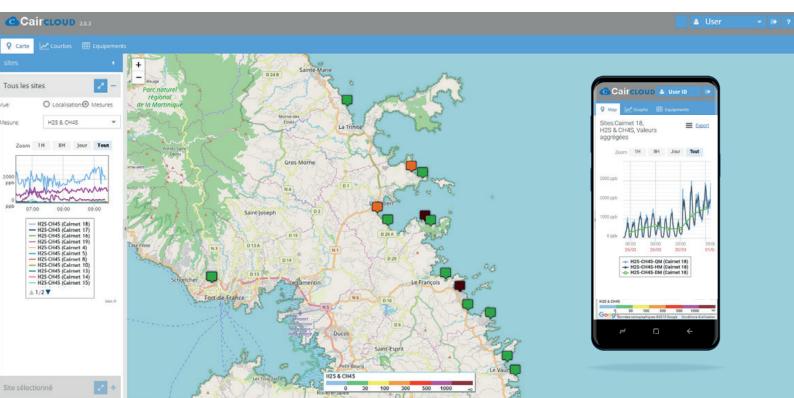

MEASURABLE PARAMETERS				
Pollutant	Range (ppb)	Certified detection limit (ppb)*	Resolution (ppb)	Order Codes
H ₂ S / CH ₄ S	0-1,000 0-20,000 0-200,000	10 30 200	1	A40-0401 A40-0402 A40-0403
NH ₃	0-25,000	500	1	A40-0408
nmVOC	0-16,000 0-2,000	500 200	1	A40-0409 A40-0410
O_3/NO_2	0-250	20	1	A40-0406
NO ₂	0-250	20	1	A40-0405
CO	0-20,000	50	1	A40-0404
SO ₂	0-1,000	50	1	A40-0407
PM10 / PM2.5 / PM1	0-1000 μg/m ³	< 5 μg/m³	0.01 μg/m ³	A40-0414





Power supply	8 to 30 V DC / 2.5 A or battery + SP	
Battery included	3.7 V - 22 Ah, Li-lon	
Solar Panels Kit (option)	27 Watts (with 2 panels). Mounting bracket included	
Control & Data Treatment Board	Internal microprocessor for data acquisition, power and communication managment e Embedded Real-Time-Clock (auto-adjusted at every communication)	
Wireless communication	Cellular 3G, 4G LTE (SIM not included) - Solar Panels kit: 4,9 Kg (for 2 pcs)	
Data storage	Internal Cairsens memory. Data buffering for back up if communication is lost	
Mounting	Fixation kit for pole, tripod, mast, wall, etc. (Ø50 mm max) included	
Dimensions of the Cairnet® housing with fixation kit & antenna	300 x 215 x 257 mm (LxHxW)	
Dimensions of the solar Panels with its fixation kit	800x410x100 mm (LxHxW)	
Weight of the Cairnet® housing	4 Kg	
Weight of the Solar Panels kit	4,9 Kg	
Environmental using conditions	-20°C to +50°C / HR 10% to 90%	

CELLULAR TECHNOLOGY:

- Technology and frequency bands: LTE (1800, 2100, 2600 MHz), WCDMA (800,1700, 2100 MHz), GPRS/Edge (850 MHz, 900 MHz, 1800 MHz, 1900 MHz)
- Download up to 100 Mbps, Upload up to 50 Mbps
- Regulatory compliance: R&TTE directive 1999/5/EC Japan JRF/JPA - FCC - IC

COMMUNICATION MODE:

- Wireless / Cellular: suitable for large surface network deployments, industrials & urban sites covered by the network.
- Serial / Modbus: suitable for local spot monitoring for applications such as health and safety, process leakage detection or area not covered by telephone network





78300 Poissy Cedex 4 - FRANCE ***** +33(0)1 39 22 38 00

info@envea.global



